

SPEEDWAY CABLE LADDER SYSTEM

Cable Drop Out

Speedway Cable Drop-Outs (CDO) are designed to provide a smooth transition for cable, particularly those with a small diameter, where these enter and leave the cable ladder.


Cable Drop-Outs are available to suit Speedway Cable Ladder of widths from 150mm to 900mm as standard and are common to all Speedway Ladder types. Other widths are available – contact our Sales Team for details.

Cable Drop-Outs are supplied with 2 fixing sets*

GA – M6x16 mushroom head bolt c-w short spring channel nut .

SS – M6x16 pan head bolt c-w short spring channel nut and flat washer.

Accessory Type: CDO

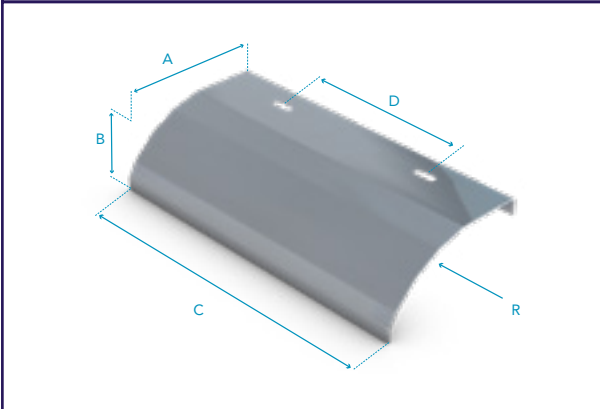

Part Number	Dimensions (mm)				
	A	B	C	D	R
SW-CDO-150-O*			130	N-A	
SW-CDO-300-O			280	150	
SW-CDO-450-O	120	60	430	300	95
SW-CDO-600-O			580	450	
SW-CDO-750-O			730	600	
SW-CDO-900-O			880	750	

○ = Select a Finish & Material

Finishes & Materials:



Supplied with:



*SW-CDO-150 has a single central fixing slot

Protective End Caps

Protective End Caps (PEC) are available for all Speedway profiles.

Manufactured in flexible yellow PVC material as standard, the protective end cap provides a visible and safe means of identifying & covering the open ends of Speedway Cable Ladder and Fittings.

Low smoke-zero halogen finish – contact our Technical Team for details.

Accessory Type: PEC



Protective end caps installed on a Speedway cable ladder

